


Communication Gateway

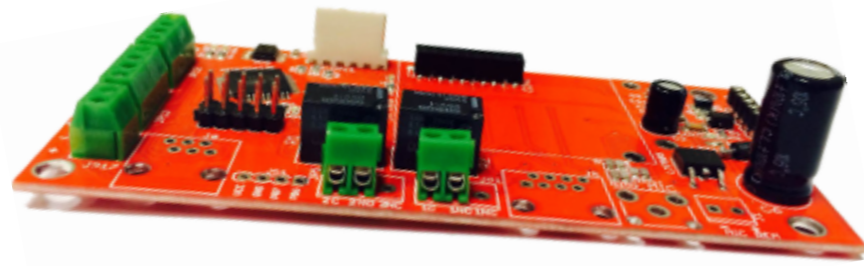

RS485


Model

SHAULA-v9: Communication Gateway for Security Alarm systems.

Features

- . SHAULA V9 is a communication Gateway for Alarm Security Systems
- . Control and monitor your Alarm security system.
- . Arm, disarm, control gates and get important call and SMS alerts
- . Supports multiple users, and user access levels.
- . Calls users on Alarm detection, and notifies if an action has been taken.
- . Supports a variety of Alarm security systems.

Dimensions (mm)

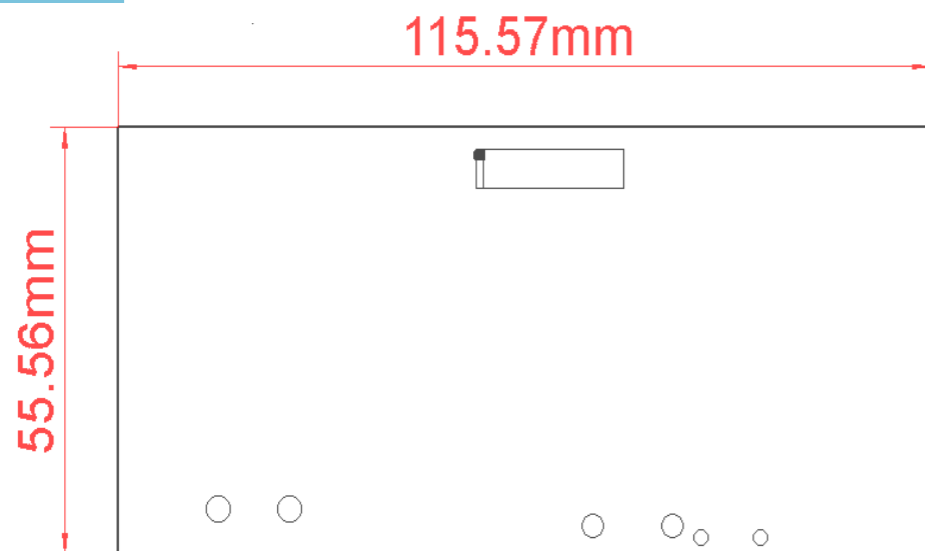

Specifications

Model	SHAULA-V9
Input voltage	12 VDC
Supply Current requirements	min 1.5A supply required
Communication Interface	GSM/GPRS (using SHAULA-701) and RS-485
User classes *1	SU [SUPER USER] x1 MU [MASTER USER] x8 NU [NORMAL USER] x8
Timers available	2
Functions supported	Gate and door control Alarm system arming and disarming Adding and removing users from list
maximum tries of calls per number in case of alarm	4

*1 for details of the roles of user classes refer to documentation

