

2.0Megapixel Waterproof & Vandal-proof Network IR Dome Camera




Model

SHELIAK-122: 2.0 Megapixel Waterproof & Vandal-proof Network IR Dome Camera

Features

- 1/3" 2 Megapixel progressive scan Exmor CMOS
- H.264 & MJPEG dual-stream encoding
- Max. 25/30fps@1080p (1920x1080)
- DWDR, Day/Night(ICR), 3DNR, Auto iris, AWB, AGC, BLC
- Multiple network monitoring: Web viewer , mobile apps
- 2.7~12mm varifocal lens
- Built-in 1/1 alarm in/out
- Max. LEDs length 20m
- IP66, PoE, IK10, Micro SD memory

Dimensions (mm)

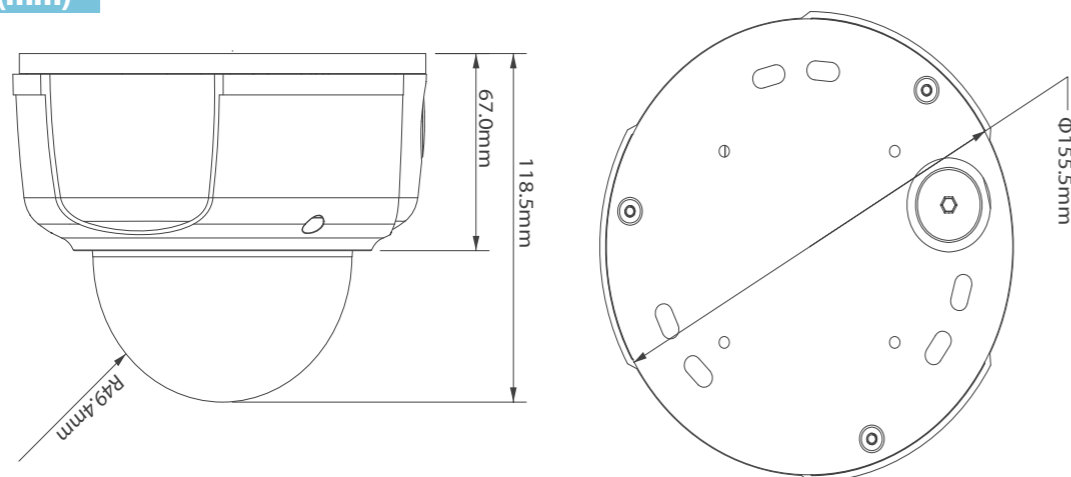

Specifications

Model	SHELIAK-122
Camera	
Image Sensor	1/3" 2Megapixel CMOS
Effective Pixels	1920(H)x1080(V)
Scanning System	Progressive
Electronic Shutter Speed	Auto/Manual 1/3~1/10000
Min. Illumination	0.1lux/F1.4(color), 0 Lux/F1.4 (IR on)
S/N Ratio	>50dB
Camera Features	
Max. LEDs Length	20m
Day/Night	Auto(ICR) / Color / B/W
Backlight compensation	BLC / HLC / DWDR
Gain Control & WB	Auto/Manual
Noise Reduction	3D
Privacy Masking	Up to 4 areas
Lens	
Focal Length	2.7~12mm
Max Aperture	F1.4
Angle of View	H: 105.6°(Wide) ~ 31.1°(Tele)
Mount TypeVideo	Board-in Type
Video	
Compression	H.264/MJPEG
Resolution	1080P(1920x1080) /D1(704x576)
Frame Rate	Main Stream 1080P(1~25/30fps) Sub Stream D1(1 ~ 25/30fps)
Bit Rate	H.264: 16K ~ 8192Kbps
Audio	
Compression	G.711a / G.711u (64kbps)/ PCM(128kbps)
Interface	1/1 channel in/Out
Network	
Ethernet	RJ-45 (10/100Base-T)
Protocol	IPv4/IPv6, HTTP, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour
ONVIF	ONVIF Profile S
Max. User Access	20 users
Smart Phone	iPhone, iPad, Android
Auxiliary Interface	
Memory Slot	Micro SD, Max 32GB
PIR Sensor Range	N/A
Alarm	1/1 channel In/Out
General	
Power Supply	AC 24V / DC12V,PoE(802.3af)
Power Consumption	<7W
Working Environment	-20°C~+60°C, less than 95%RH
Dimensions(WxDxH)	151mmx119mm
Weight	1.25kg
Ingress protection	IK10
Vandal resistance	IP66