

3MP Indoor Fisheye Dome Camera with D/N, WDR & Fixed Lens




Model

SHELIAC-123: 3.0 MP Indoor fisheye dome camera with D/N, superior WDR and fixed lens.

Features

- 1/3" 3 Megapixel progressive scan CMOS
- H.264 & MJPEG dual-stream encoding
- Max. 15/20 fps@ (2048 x 1536)
- Superior WDR, Day/Night, DNR
- Fixed focal, f1.19mm / F2.0, Fixed iris, Fixed focus lens
- Video motion detection (3 regions); External device through digital input for Alarm
- IPv6, PoE, Micro SD memory

Dimensions (mm)

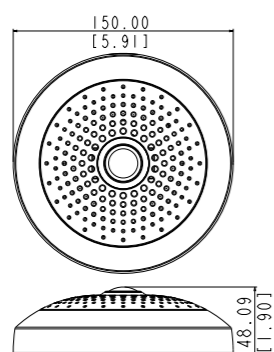

Unit: mm [inch]

Specifications

Model	SHELIAC-123
Camera	
Image Sensor	1/3" 3Megapixel CMOS
Effective Pixels	2048 x 1536
Scanning System	Progressive
Electronic Shutter Speed	1/5 ~ 1/2,000 sec (manual mode), 1/5 ~ 1/10,000 sec (auto mode)
Min. Illumination	Color: 0.1 lux at F2.0; B/W: 0.05 lux at F2.0
S/N Ratio	52dB
Lens	
Focal Length	Fixed (Fisheye lens), f1.19 mm
Max Aperture	F2.0
Angle of View	180° (overview area), 109.8° (high detail area)
Mount Type	Board mount
Video	
Compression	H.264/MJPEG
Resolution	15 fps at 2048 x 1536; 15 fps at 640 x 480; 15 fps 320 x 240
Frame Rate	20/15 fps
Bit Rate	28 Kbps - 6 Mbps (per stream)
Audio	
Compression	8 kHz, Mono, PCM, 16 bit encoding; G.711
Interface	1/1 channel in/Out
Network	
Ethernet	RJ-45 (10/100Base-T)
Protocol	TCP, UDP, HTTP, HTTPS, DHCP, PPPoE, RTP, RTSP, IPv6, DNS, DDNS, NTP, ICMP, ARP, IGMP, SMTP, FTP, UPnP, SNMP, Bonjour
ONVIF complaint	YES
Security	IP address filtering; HTTPS encryption; Password protected user levels; Anonymous login; IEEE802.1X network access control
Auxiliary Interface	
Memory Slot	MicroSDHC/MicroSDXC memory card slot
PIR Sensor Range	N/A
Digital input/ output	1, Terminal block
General	
Power Supply & Consumption	PoE Class 2 (IEEE 802.3af) / 4.5 W DC 12V / 3.5 W
Working Environment	-10 °C - 50°C (14°F - 122°F) , 10% ~ 85% RH
Dimensions(WxDxH)	150mm x 48mm (5.91" x 1.90")
Weight	338 g (0.75 lb)

